


Końcówka rurowa KCS

do kabli Cu wielodrutowych

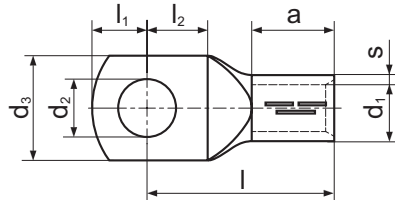

Materiał: miedź cynowana galwanicznie
niecynowane na zamówienie

Przekrój żyły [mm ²]	Pod śrubę M	d ₂ [mm]	Oznaczenie końcówki	s [mm]	d ₁ [mm]	d ₃ [mm]	a [mm]	l ₁ [mm]	l ₂ [mm]	l [mm]	Waga [g/szt.]	Liczba [szt.]	Wyróżnik matryc zaciskowych	Narzędzia do zaciskania
2,5	4	4,3	KCS 4-2,5	0,95	2,3	7,5	7	5	6	17	1,66	100		
	5	5,3	KCS 5-2,5			8,5	5,5	6,2	17	1,70				
	6	6,4	KCS 6-2,5			9,5	6,7	7,3	18	1,82				
	8	8,4	KCS 8-2,5			13	7,3	10	22	2,05				
4	4	4,3	KCS 4-4	1	3	8,5	8	5	6	19	2,30	50		PR33, PP19
	5	5,3	KCS 5-4			9	5,5	6,2	19	2,30				
	6	6,4	KCS 6-4			10	6,5	7,3	20	2,44				
	8	8,4	KCS 8-4			13	9,5	10	23	2,90				
6	4	4,3	KCS 4-6	1	4	9,5	9	5	6	20	3,26	50	6	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, PR33, GO300, HR300, GU300, GU120, HR100-U, PR240, PR50, PP19, A11/6
	5	5,3	KCS 5-6			9,5	6	6,2	20	3,32				
	6	6,4	KCS 6-6*			11	9	6	7,5	21,5	3,48			
	8	8,4	KCS 8-6			13	9,5	10	24	4,10				
10	5	5,3	KCS 5-10	1,2	4,5	12	10	7,5	8	23	5,32	50	7	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR50, R50, PP19
	6	6,4	KCS 6-10*			12	9	6	7,5	22,5	5,54			
	8	8,4	KCS 8-10*			14	9	8	9	24,5	5,96			
	10	10,5	KCS 10-10*			16	9	10	11	27	6,36			
16	5	5,3	KCS 5-16	1,5	5,5	13	13	8,2	8,2	28	9,96	50	8	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR50, R50, PP19
	6	6,4	KCS 6-16*			12,5	10	6	7,5	24	9,12			
	8	8,4	KCS 8-16*			14,5	10	8	9	26	10,06			
	10	10,5	KCS 10-16*			17	10	10	11	28	10,56			
25	6	6,4	KCS 6-25*	1,5	7	14	11	6	7,5	27	11,74	50	10	PP19 + jak niżej
	8	8,4	KCS 8-25*			16	11	8	9	28	13,06			
	10	10,5	KCS 10-25*			18	11	10	11	31	15,56			
	12	13	KCS 12-25			19	13	14	35	15,32				
35	6	6,4	KCS 6-35*	1,75	8,5	17	15	6	7,5	31,5	18,90	20	12	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR120, PR150, PR50, PP19, A11/6
	8	8,4	KCS 8-35*			17	15	8	9	33	20,35			
	10	10,5	KCS 10-35*			19	15	10	11	35	21,80			
	12	13	KCS 12-35			21	13	14	38	23,15				
	14	15	KCS 14-35			21	15,5	15,5	40	23,80				
50	8	8,4	KCS 8-50*	2	10	20	17	8	10	38,5	32,30	20	14	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR120, PR150, PR50, PP19, A11/6
	10	10,5	KCS 10-50*			20	17	10	11	39	31,25			
	12	13	KCS 12-50*			21	17	12	13	40,5	31,4			
	14	15	KCS 14-50			23	15,5	15,5	43	32,70				
	16	17	KCS 16-50			28	16	17	45	35,80				

Końcówka rurowa KCS

do kabli Cu wielodrutowych

Przekrój żyły [mm ²]	Pod śrubę M	d ₂ [mm]	Oznaczenie końcówki	s [mm]	d ₁ [mm]	d ₃ [mm]	a [mm]	l ₁ [mm]	l ₂ [mm]	l [mm]	Waga [g/szt.]	Liczba [szt.]	Wyróżnik matryc zaciskowych	Narzędzia do zaciskania						
70	8	8,4	KCS 8-70*	2,25	12	23,5	17	8	10	40	47,55	20	16							
	10	10,5	KCS 10-70*												23,5	17	10	11	42	41,00
	12	13	KCS 12-70												23,5		13	14	46	47,20
	14	15	KCS 14-70												23,5		15,5	15,5	48	49,65
	16	17	KCS 16-70												28		16	17	50	49,70
95	8	8,4	KCS 8-95	2,25	13,5	26	23	10	11	49	55,80	10	18							
	10	10,5	KCS 10-95*												26	20	10	11	44	48,50
	12	13	KCS 12-95*												26	20	12	13	47	59,70
	14	15	KCS 14-95												26		15,5	15,5	53	59,20
	16	17	KCS 16-95												28		16	17	55	59,80
	20	21	KCS 20-95												34		19	20	57	69,80
120	8	8,4	KCS 8-120	2,25	15,5	29	26	10	11	51	64,70	10	19							
	10	10,5	KCS 10-120*												29	23	10	11	51	68,40
	12	13	KCS 12-120												29	23	12	13	53	72,80
	14	15	KCS 14-120												29		15,5	15,5	56	72,80
	16	17	KCS 16-120												29		16	17	56	72,30
	20	21	KCS 20-120												35		19	20	61	78,40
150	10	10,5	KCS 10-150	2,25	17	31	28	12	13	57	83,00	10	20							
	12	13	KCS 12-150												31	28	13	14	58	81,60
	14	15	KCS 14-150												31		15,5	15,5	62	76,40
	16	17	KCS 16-150												31		16	17	62	93,50
	20	21	KCS 20-150												36		19	20	66	96,70
185	10	10,5	KCS 10-185	2,5	19	35	30	12	13	62	105,00	10	23							
	12	13	KCS 12-185												35		13	14	63	112,00
	14	15	KCS 14-185												35		15,5	15,5	65	110,80
	16	17	KCS 16-185												35		16	17	67	112,00
	20	21	KCS 20-185												39		19	20	69	118,20
240	10	10,5	KCS 10-240	2,5	21,5	39	35	12	13	66	125,00	10	25							
	12	13	KCS 12-240												39	30	12	13	61	120,00
	14	15	KCS 14-240												39		15,5	15,5	68	123,20
	16	17	KCS 16-240												39		16	17	70	135,00
	20	21	KCS 20-240												39		19	20	73	140,60
300	12	13	KCS 12-300	3	24,5	45	45	13	14	80	195,00	10	30							
	14	15	KCS 14-300												45		15,5	15,5	81	211,05
	16	17	KCS 16-300												45		16	17	83	205,00
	20	21	KCS 20-300												45		19	20	86	217,80
400	12	13	KCS 12-400	3,5	27	49	44	24	24	92	335,00	5	34							
	14	15	KCS 14-400												49		24	24	92	285,00
	16	17	KCS 16-400												49		24	24	92	345,83
	20	21	KCS 20-400												49		24	24	92	281,00

Wykonanie z otworem kontrolnym wg indywidualnych ustaleń – oznaczenie KCS-K.

* – nowe wykonanie.